

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050-1150	1250	1350-1450
FEET	7	11	14	17	18	19	22
METERS	2,1	3,4	4,3	5,2	5,5	5,8	6,7

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38222-701 CURVE T10A-B-4

IMPELLER 38615-014 MODEL T10A-B

SIZE 10"X10" IMP.DIA. 14.75"

SP.GR. 1.0 RPM NOTED

Note:
Select performance within operating range of curve.

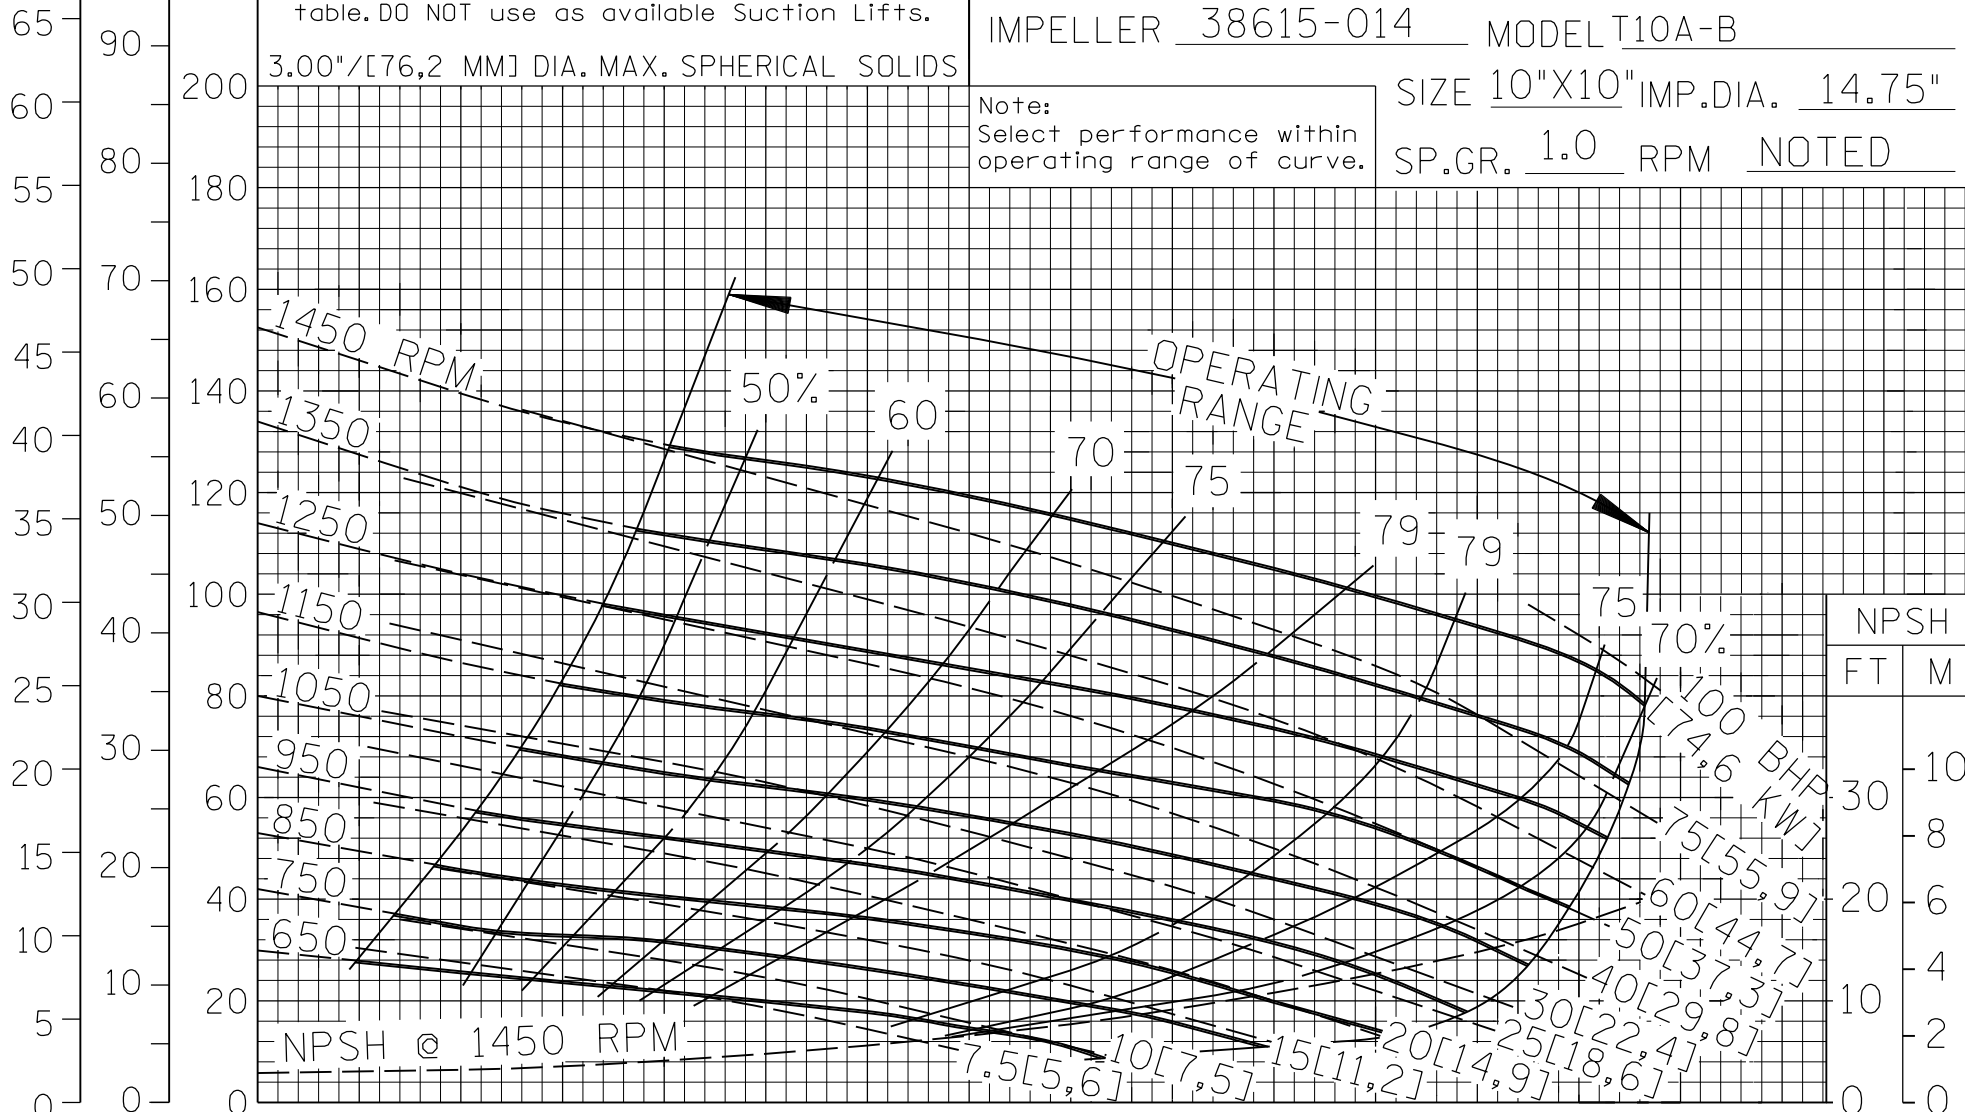

NPSH	
FT	M
30	10
20	6
10	3
0	0

FILE NO. T10ab.s04



T-5-99-R