

TOTAL HEAD

M PSI FT

REPRIMING LIFTS					
RPM	1250	1450	1650	1850	1950
FEET	18	19	21	22	23
METERS	5,5	5,8	6,4	6,7	7,0

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38224-612 CURVE V6A-B-1

IMPELLER 38615-102 MODEL V6A-B

SIZE 8"X6" IMP.DIA. 12.38"

SP.GR. 1.0 RPM NOTED

Note:
Select performance within operating range of curve.

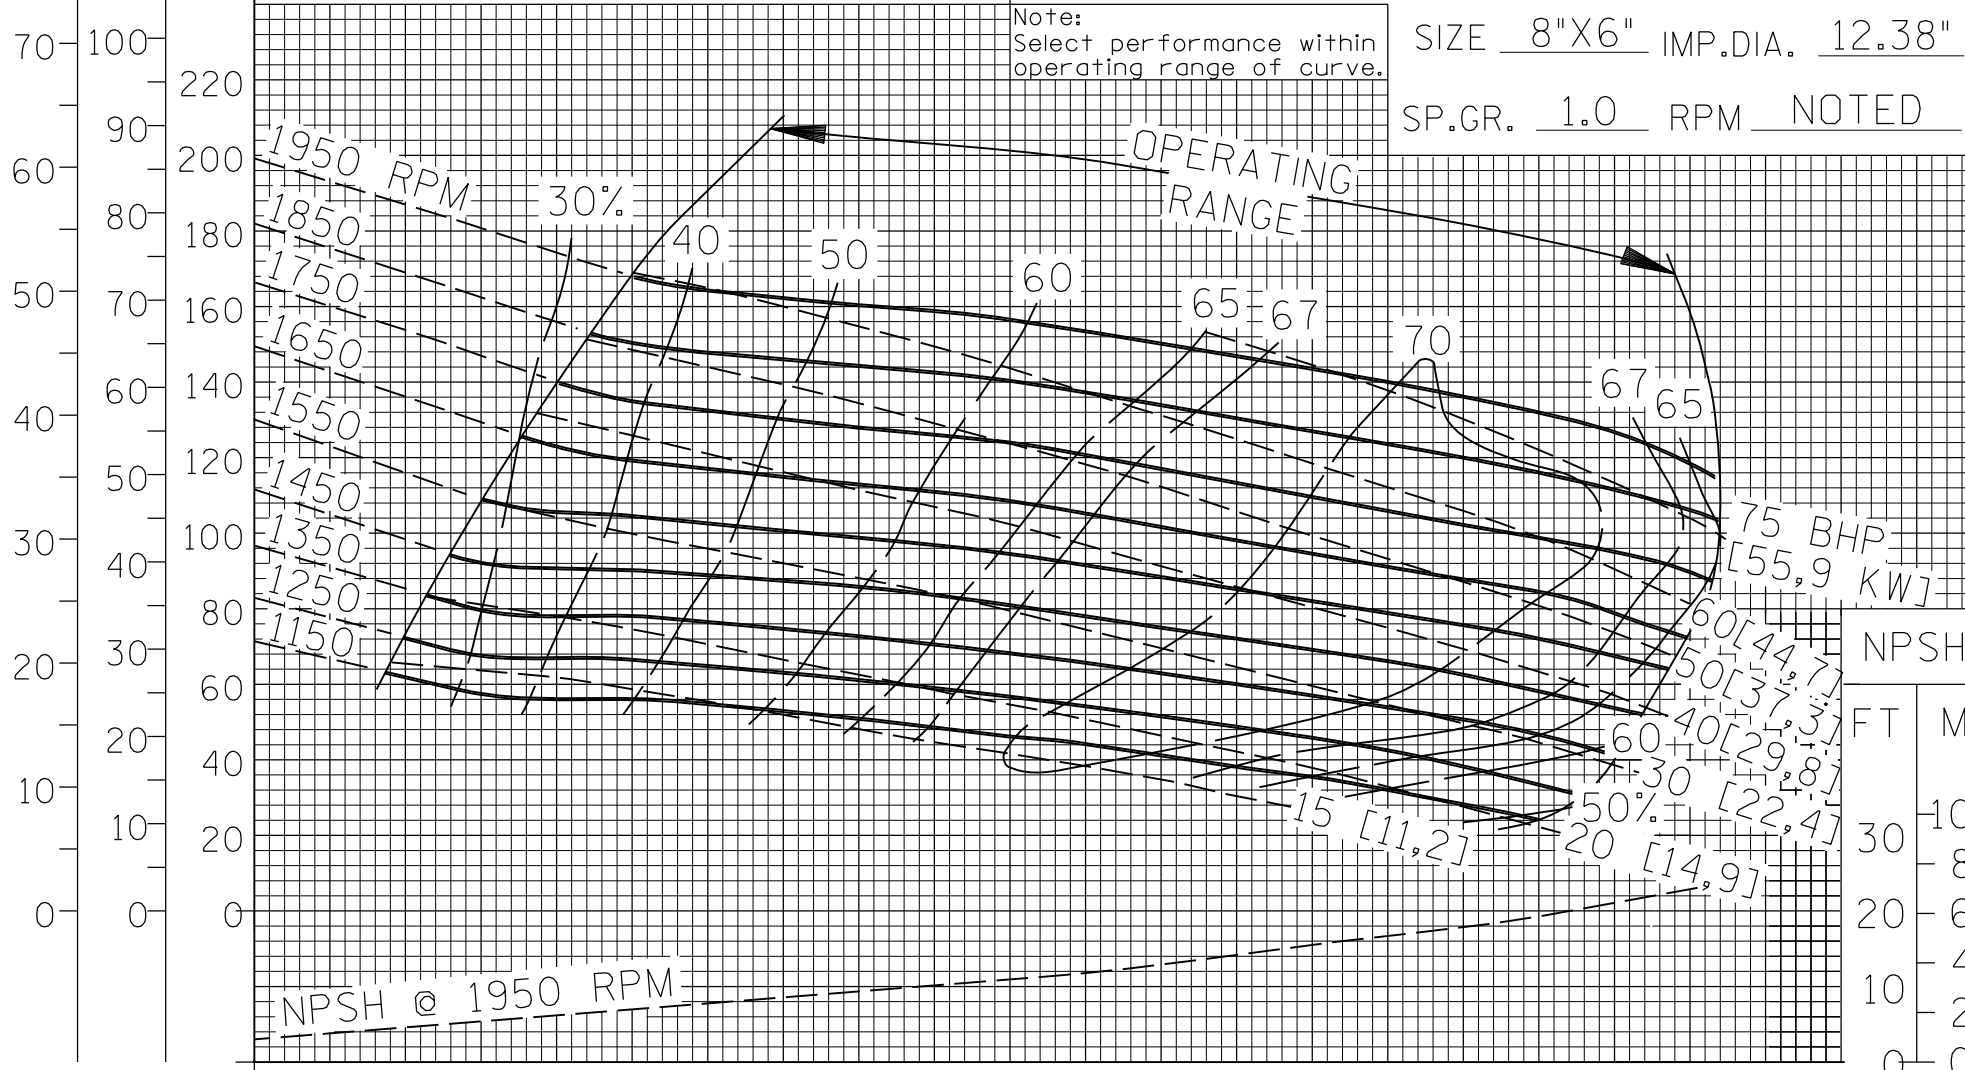

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

NPSH FT M

FILE NO. v6ab.s01



T-2-10-R