

TOTAL HEAD

M PSI FT

REPRIMING LIFTS					
RPM	650	850	1050	1250	1450
FEET	5	11	15	18	19
METERS	1,5	3,4	4,6	5,5	5,8

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38224-612 CURVE V6A-B-3

IMPELLER 38615-102 MODEL V6A-B

Note:
Select performance within operating range of curve.

SIZE 8"X6" IMP.DIA. 12.38"

SP.GR. 1.0 RPM NOTED

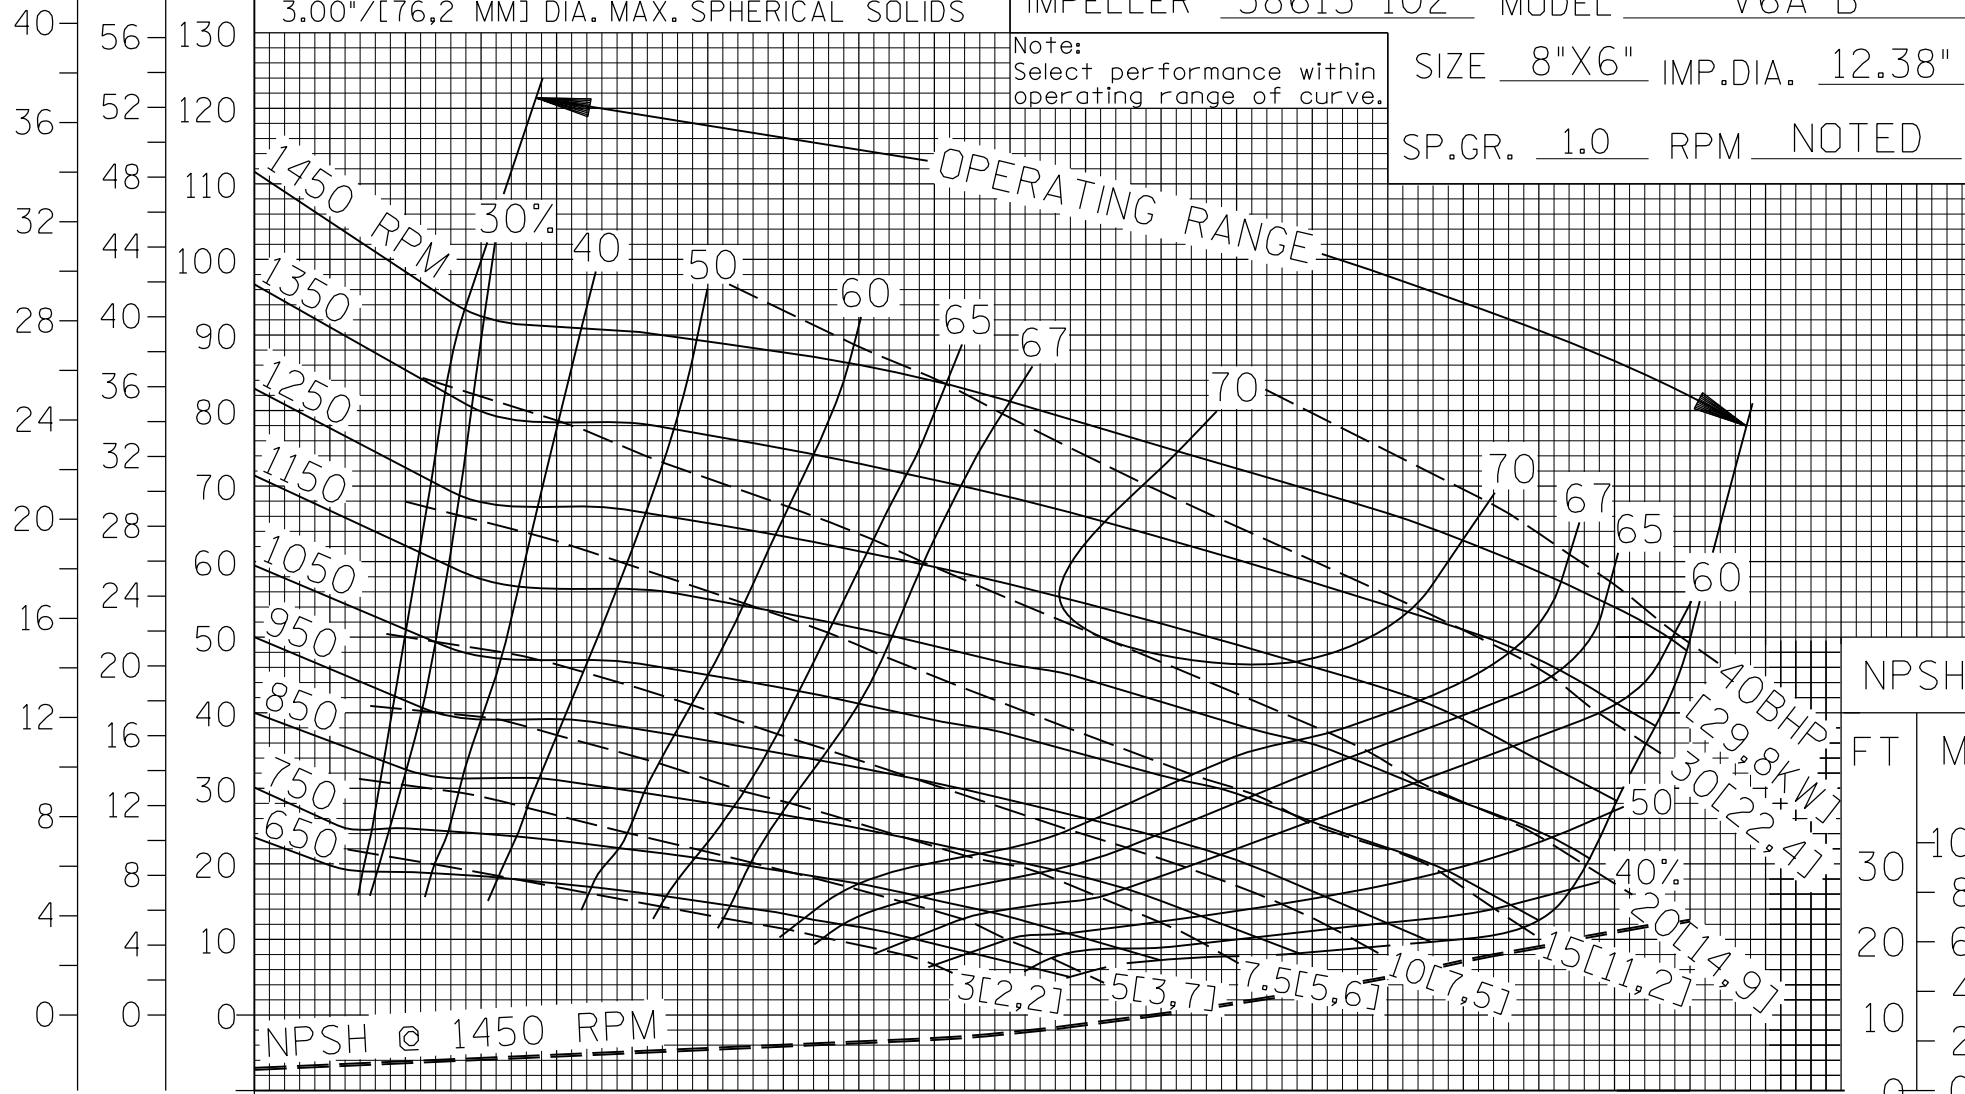

NPSH
FT M
40BHP
[29,8KW]
30[22,4]
40%
20[14,9]
15[11,2]
10[7,5]
7.5[5,6]
5[3,7]
3[2,2]

FILE NO. V6AB.S03



T-2-10-R