

PERFORMANCE CURVE

REPRIMING LIFTS						
RPM	1650	1850	2050	2250	2450	2600
FEET	23	23	24	25	25	25
METERS	7,0	7,0	7,3	7,6	7,6	7,6

Figure NPSH required prior to using above table.
DO NOT use as available Suction Lift.

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS


VOLUTES 38224-614 CURVE VS3A-B-1
38219-306

IMPELLER 38615-103 MODEL VS3A-B

SIZE 4"X3" IMP.DIA. 9.00"

Note:
Select performance within
operating range of curve.

SP.GR. 1.0 RPM NOTED

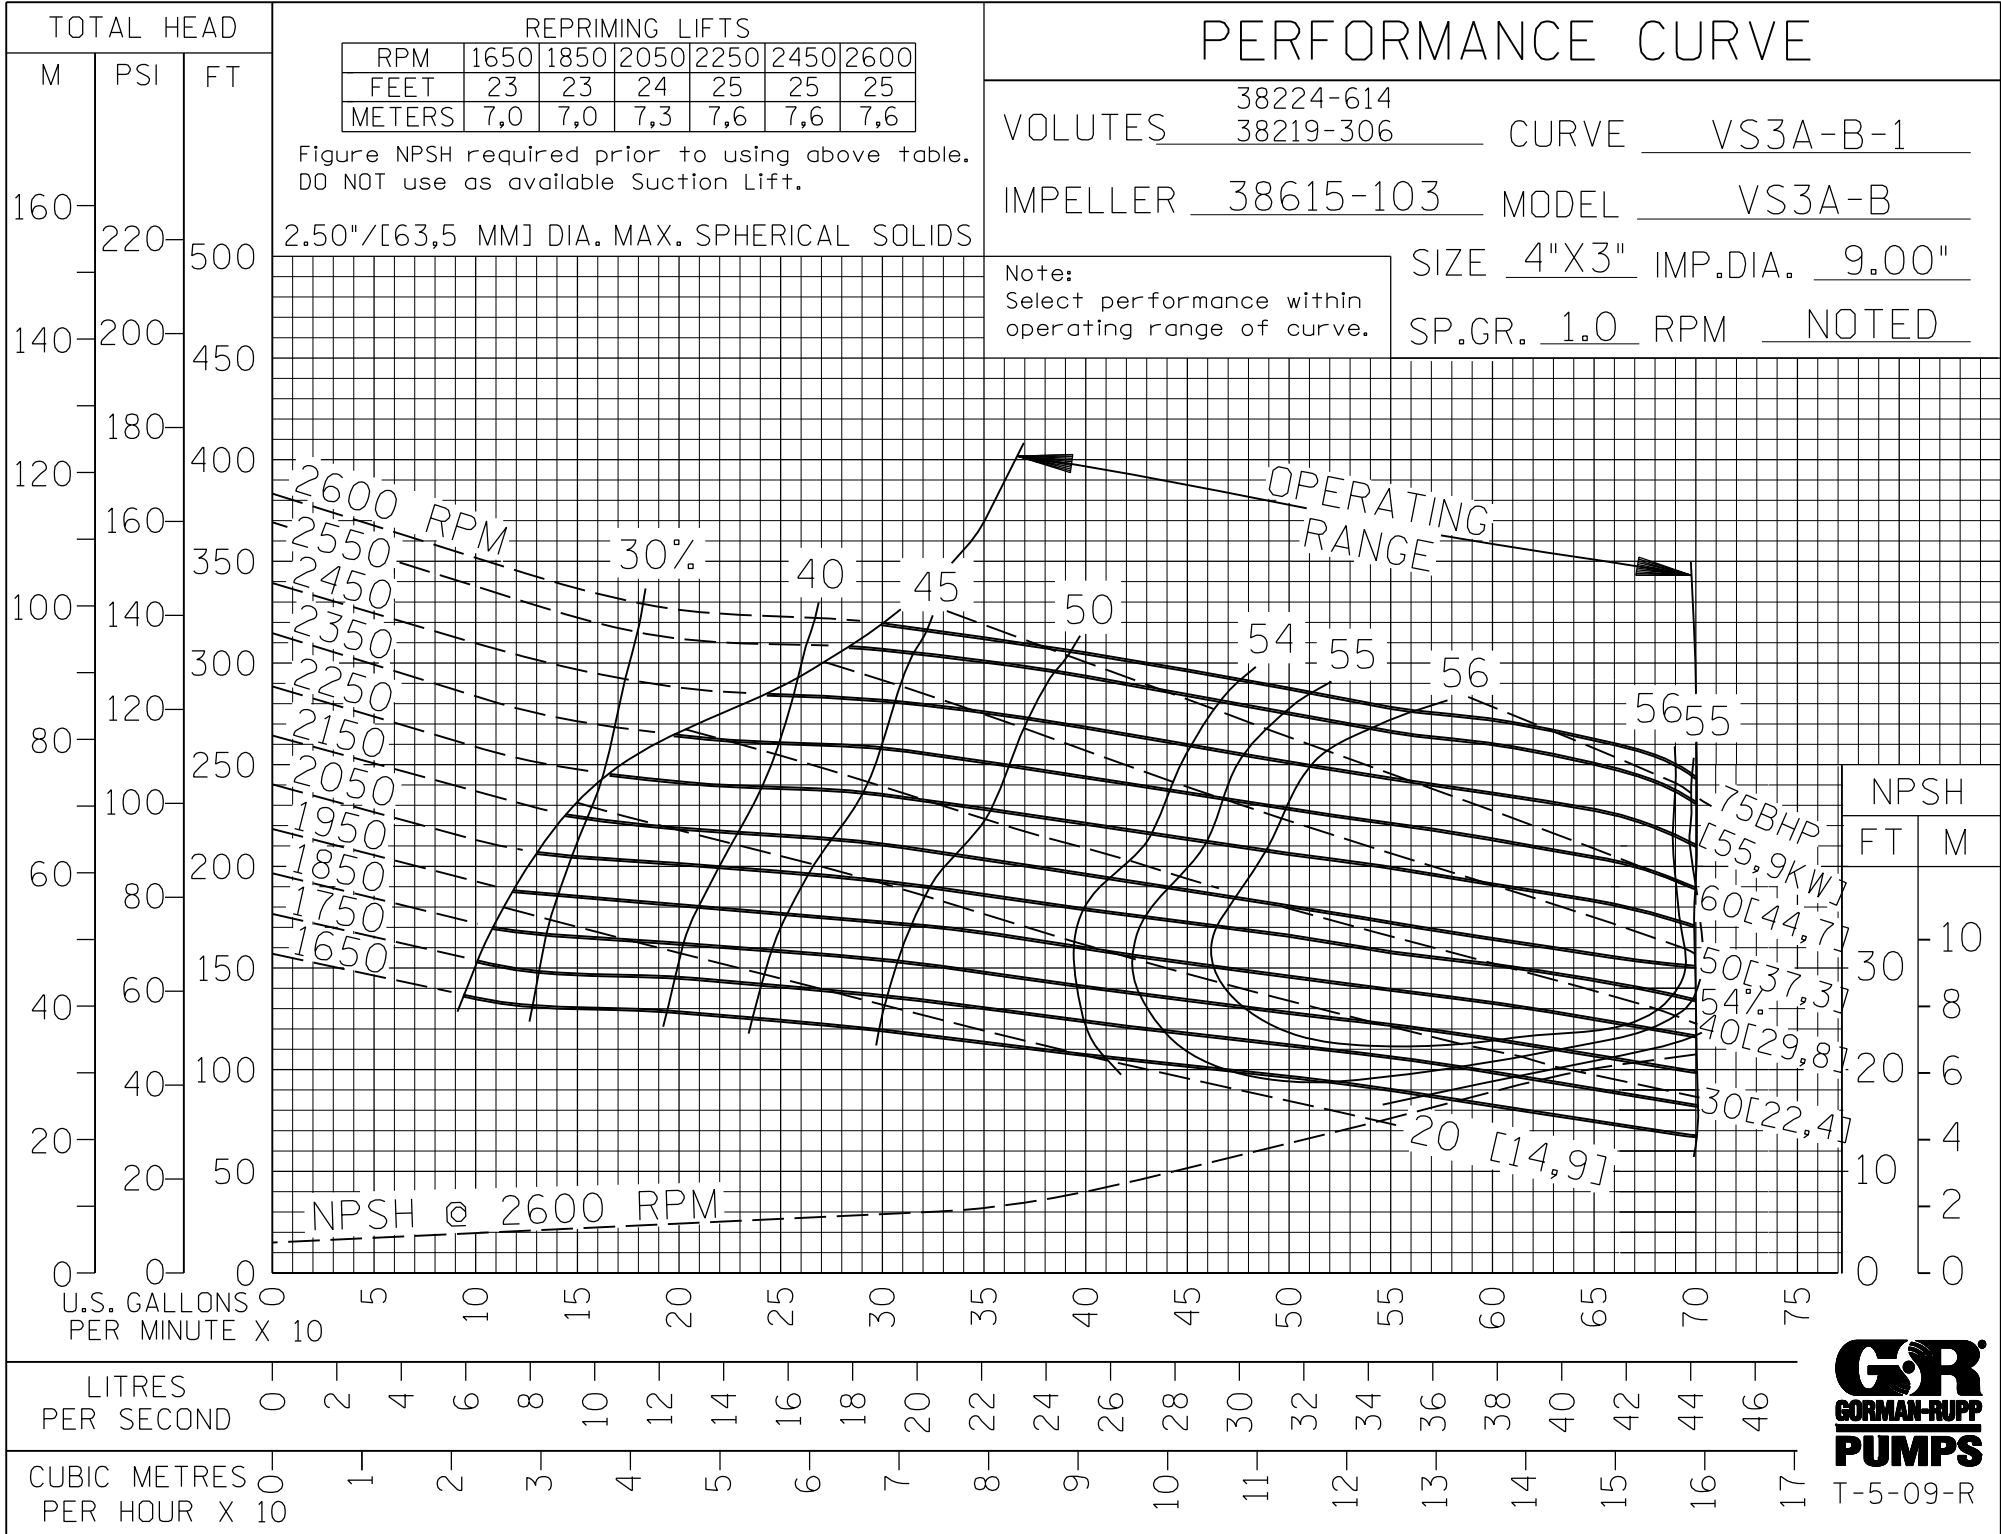

FILE NO. vs3ab.s01



T-5-09-R