

TOTAL HEAD

REPRIMING LIFTS

RPM	1450	1650	1850	2050	2250	2400
FEET	17	20	24	24	24	24
METERS	5.2	6.1	7.3	7.3	7.3	7.3


PERFORMANCE CURVE

VOLUTE 38224-613 38219-307 CURVE VS4A-B-1
 IMPELLER 38615-104 MODEL VS4A-B
 SIZE 6"X4" IMP.DIA. 9.75"
 SP.GR. 1.0 RPM NOTED

Figure NPSH required prior to using above table.
 DO NOT use as available Suction Lift.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

Note:
 Select performance within
 operating range of curve.

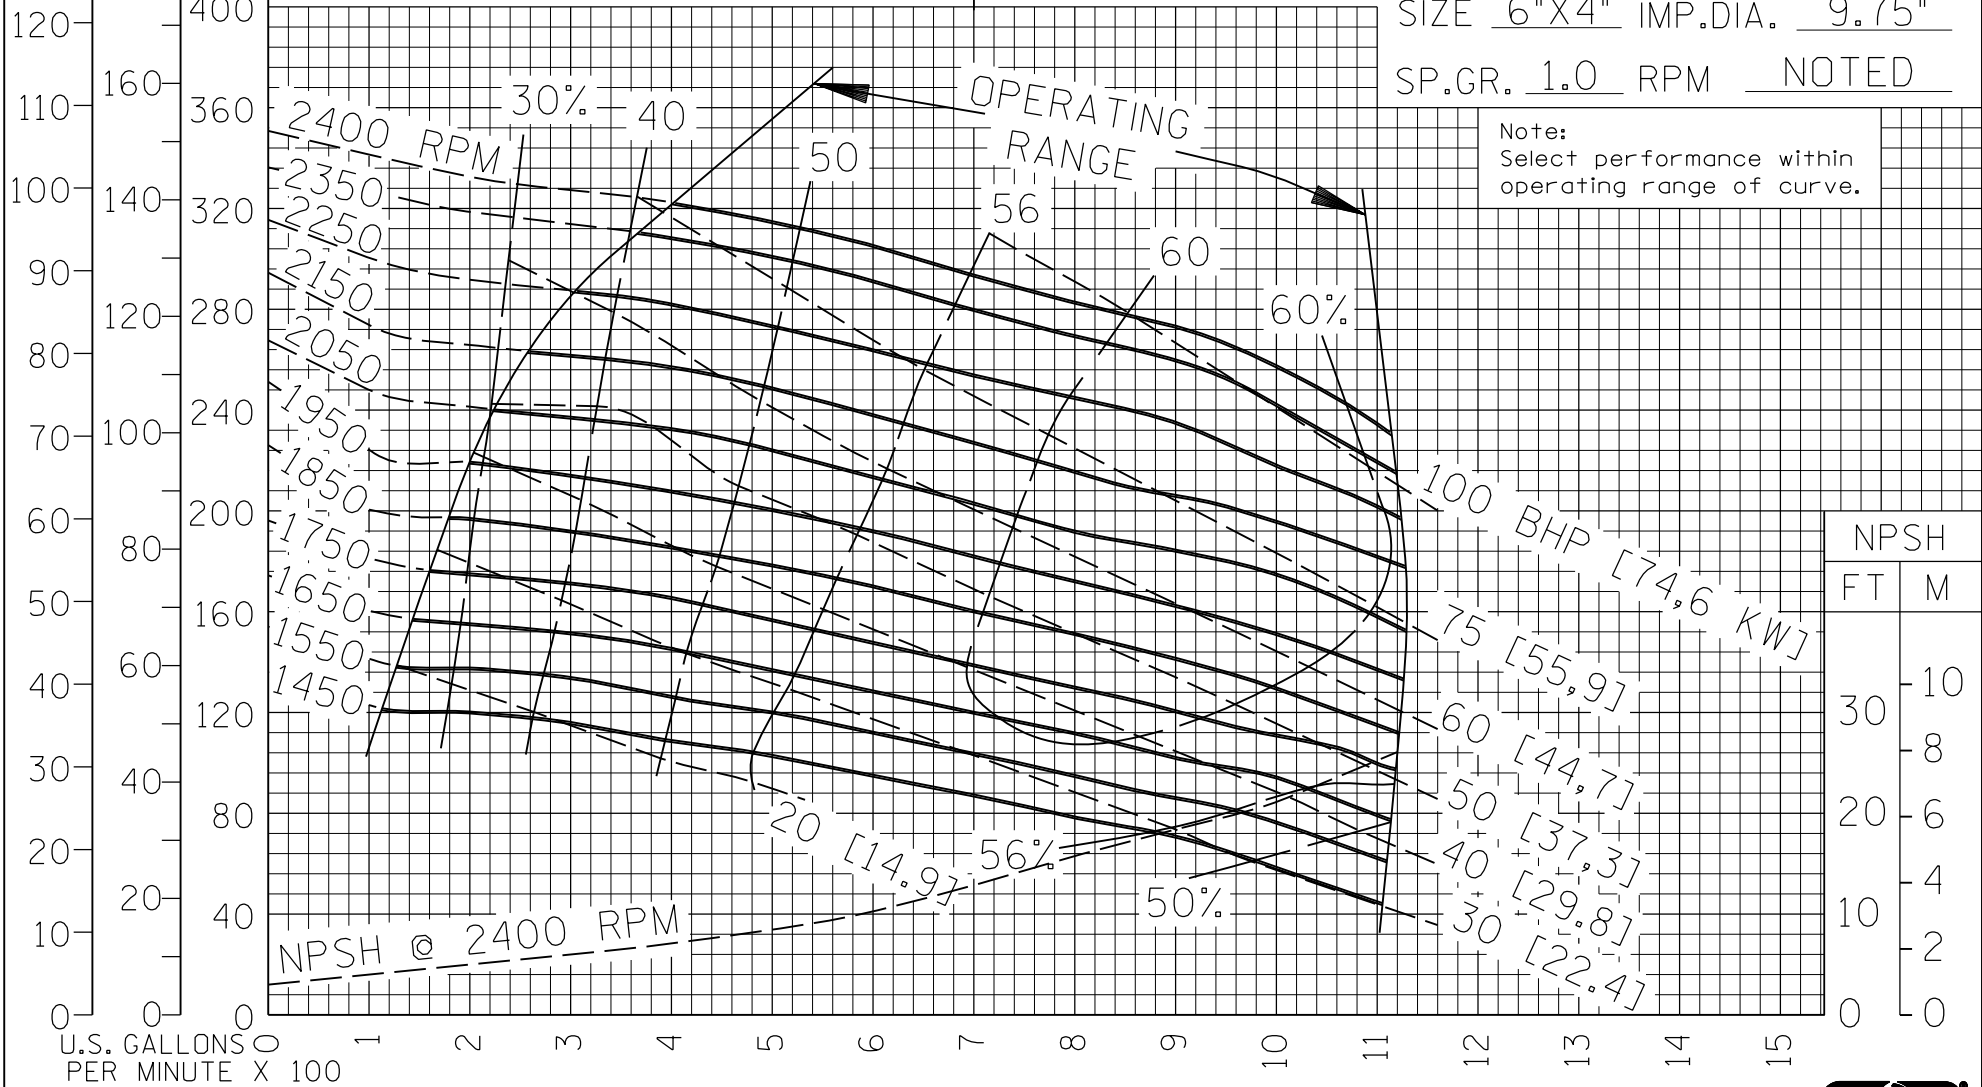

NPSH	
FT	M
30	10
8	2
20	6
4	1
10	3
2	0.6
0	0

FILE NO. vs4ab.s01

LITRES PER SECOND

CUBIC METRES PER HOUR X 10



T-5-09-R