

TOTAL HEAD

REPRIMING LIFTS

RPM	1250	1450	1650	1850	1950
FEET	20	21	22	24	24
METERS	6,1	6,4	6,7	7,3	7,3


PERFORMANCE CURVE

VOLUTES 38224-612 CURVE VS6A-B-1
38219-501
 IMPELLER 38615-102 MODEL VS6A-B

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
 3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

Note:
 Select performance within operating range of curve.

SIZE 8"X6" IMP.DIA. 12.38"
 SP.GR. 1.0 RPM NOTED

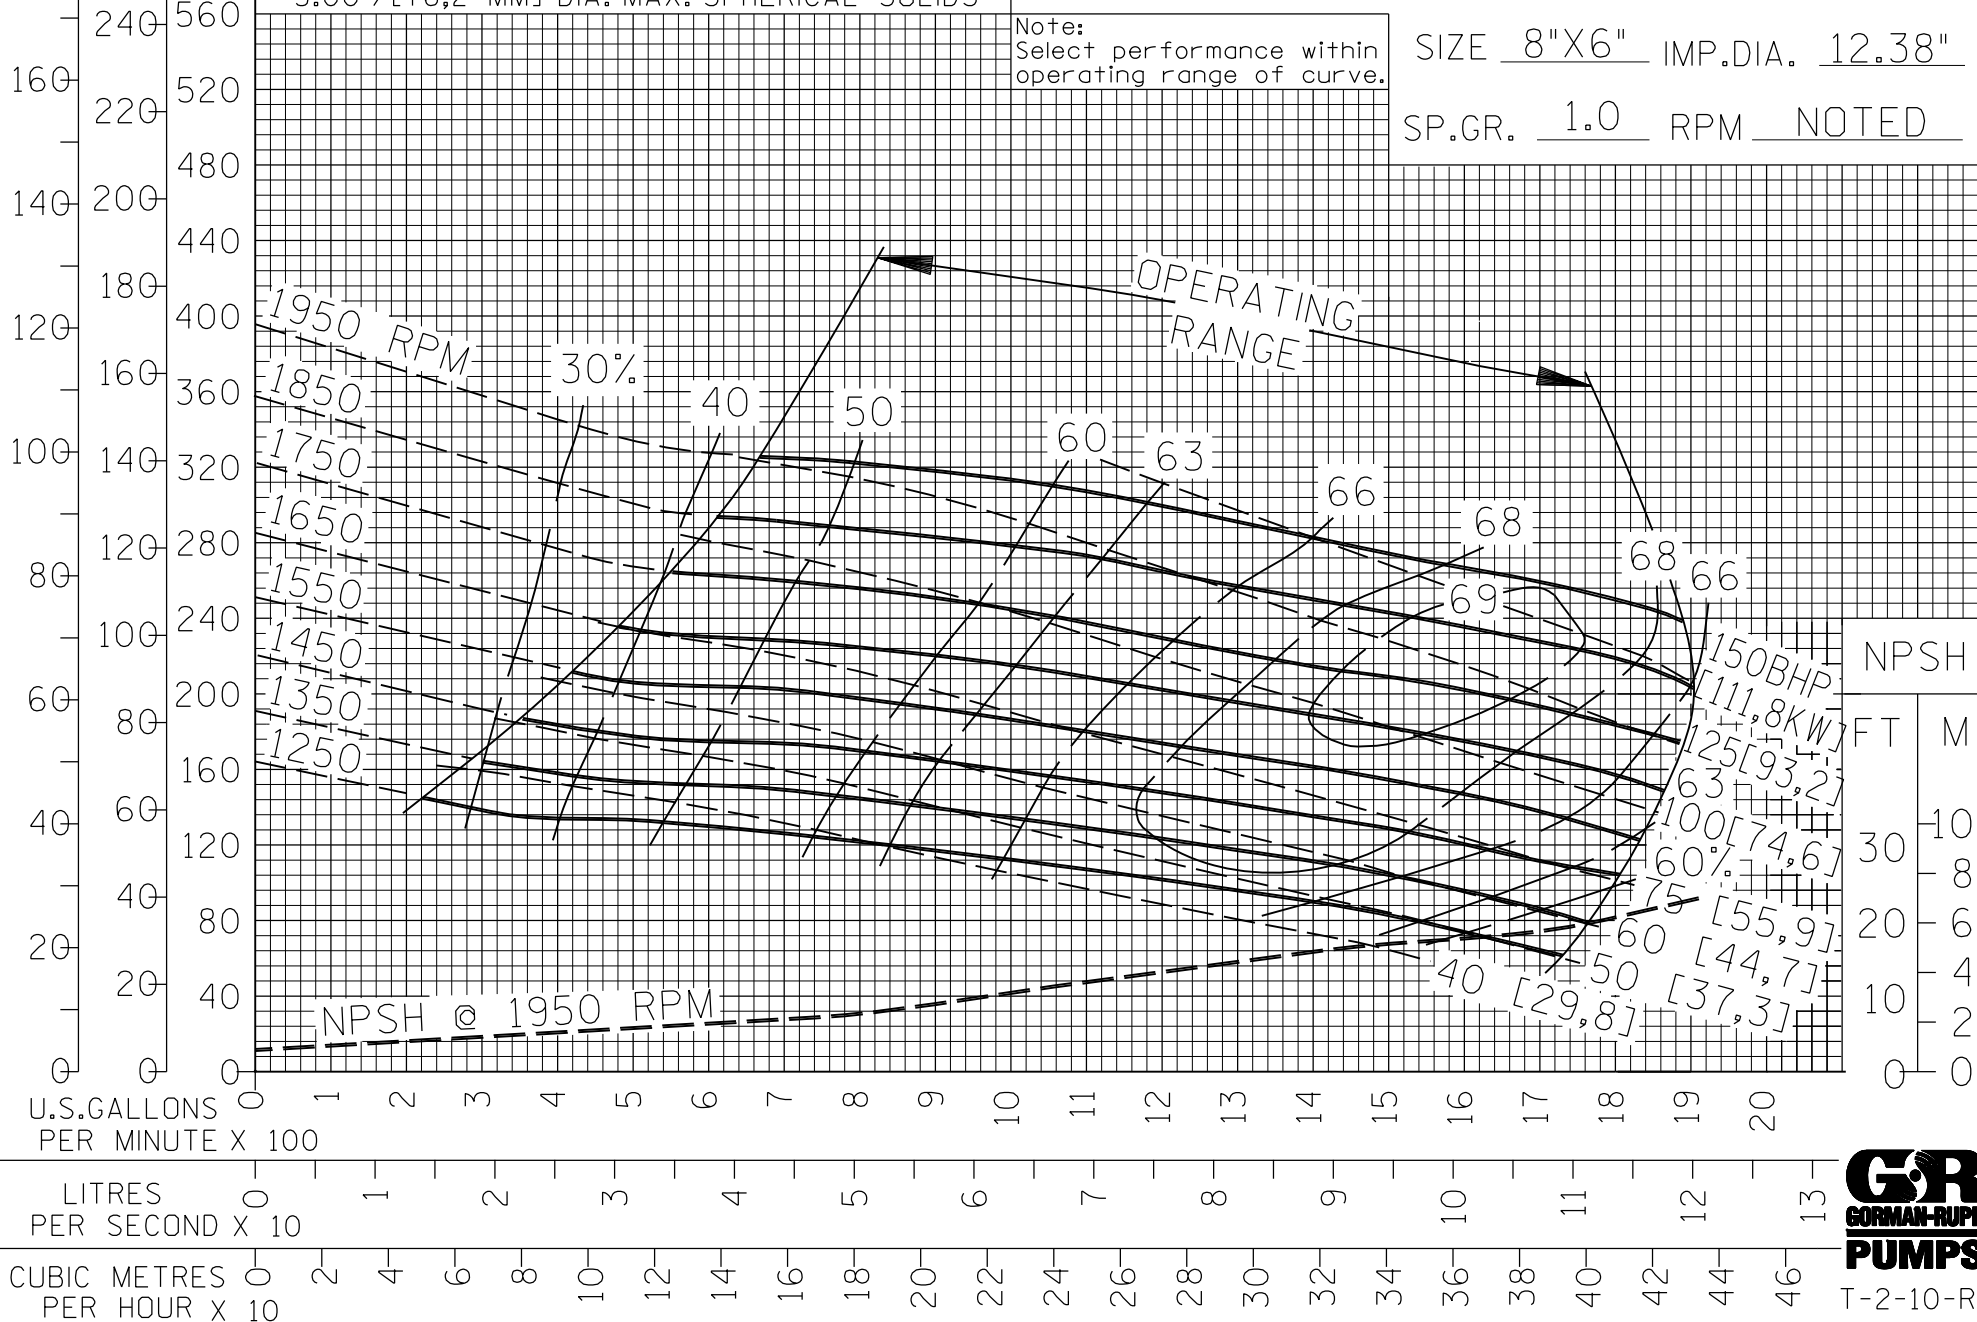

FILE NO. vs6ab.s01



T-2-10-R