

TOTAL HEAD

M PSI FT

REPRIMING LIFTS

RPM	650	850	1050	1150
FEET	8	13	18	19
METERS	2,4	4,0	5,5	5,8


Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.
3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTES 38224-612 CURVE VS6A-B-3
 IMPELLER 38615-102 MODEL VS6A-B

Note:
Select performance within operating range of curve.

SIZE 8"X6" IMP.DIA. 12.38"
 SP.GR. 1.0 RPM NOTED

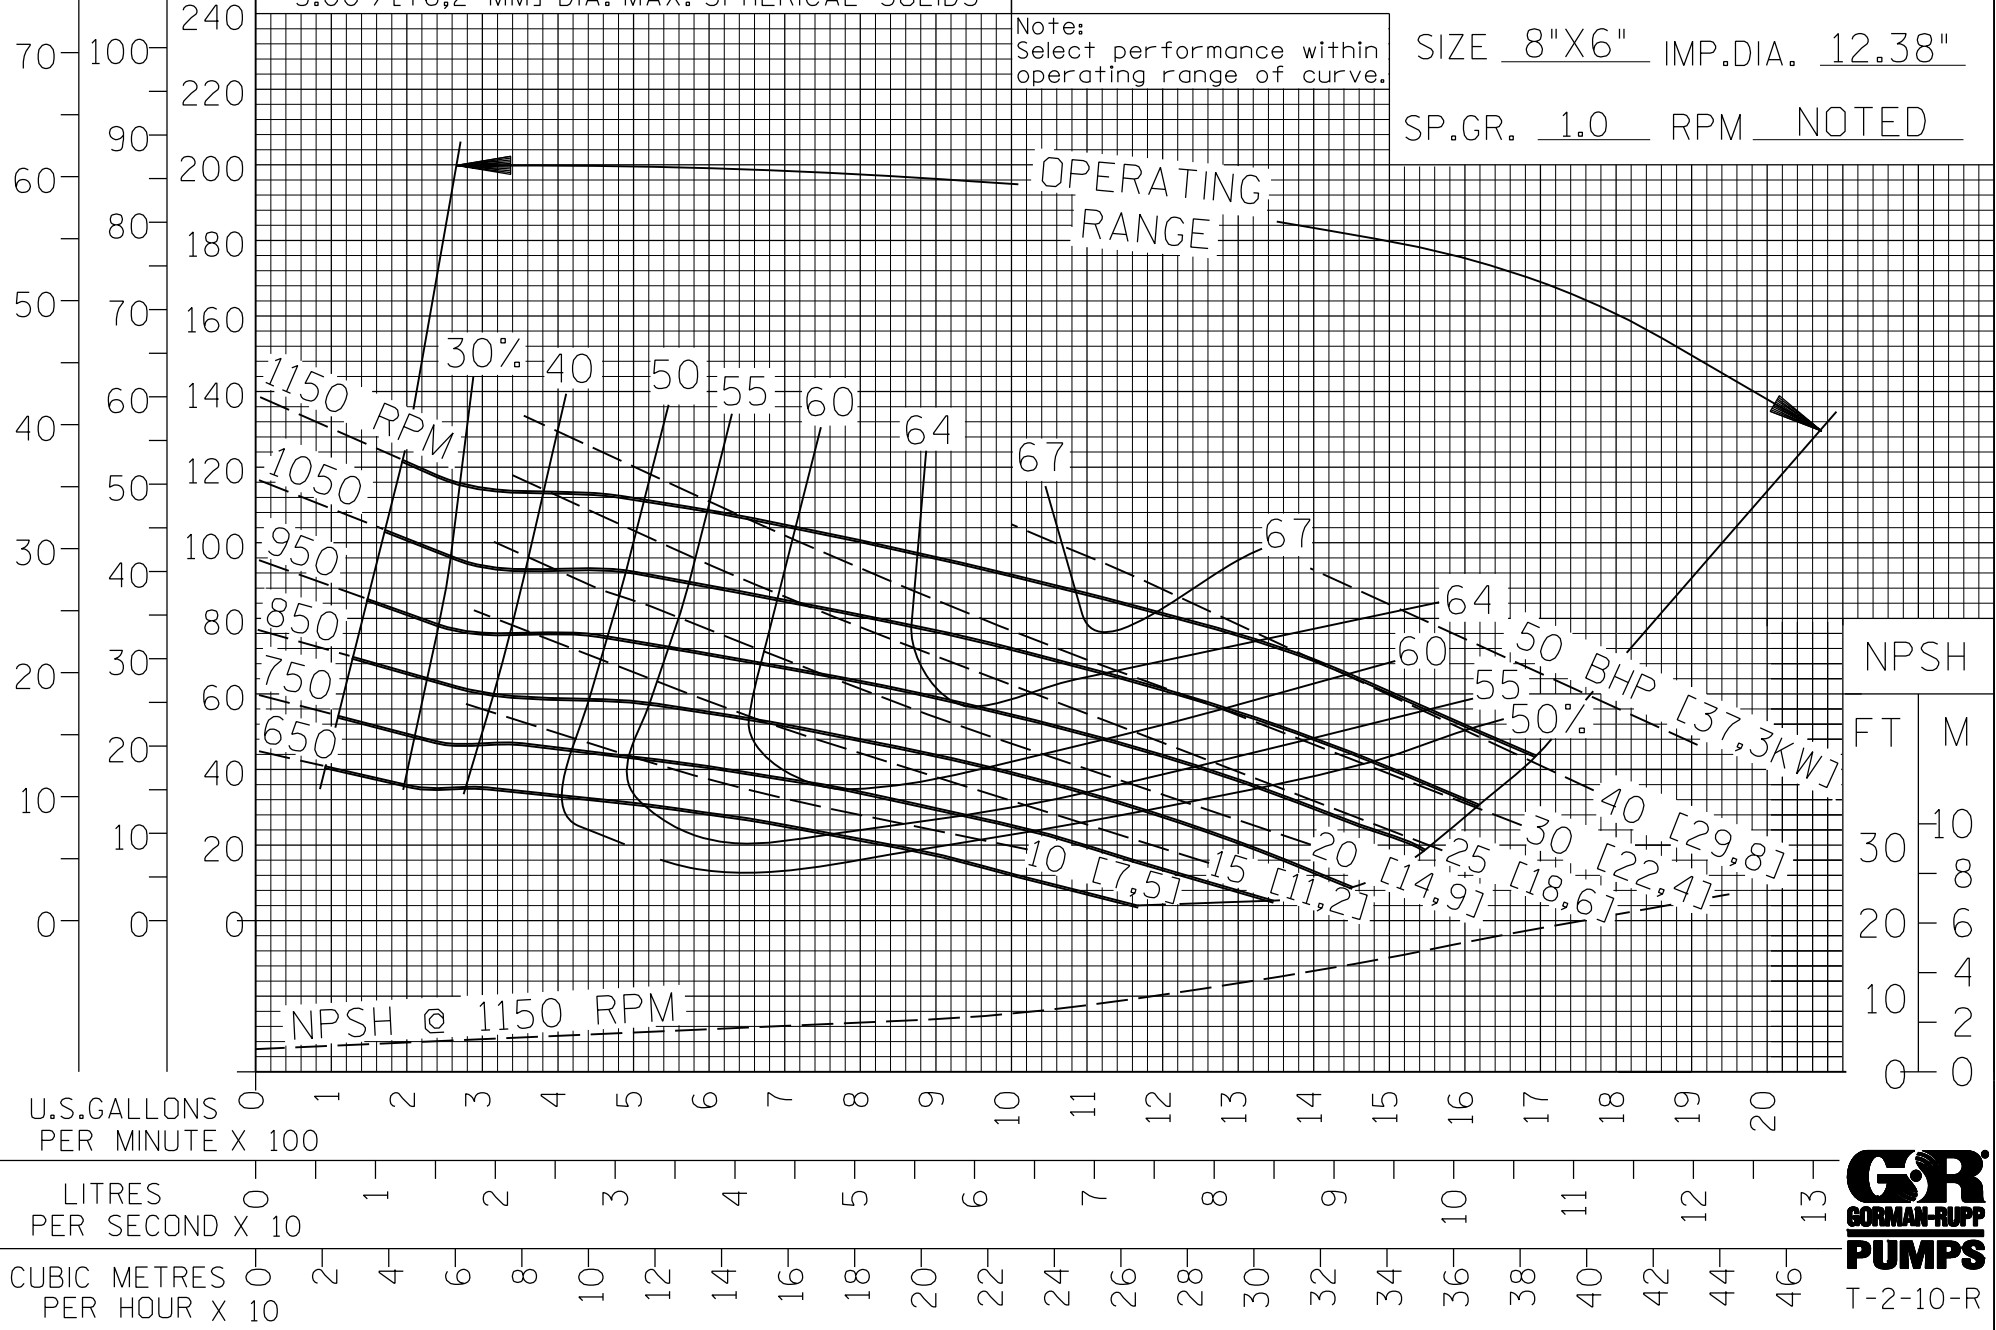

FILE NO. vs6db.s03



T-2-10-R